




# CETANE NUMBER COMPARISON

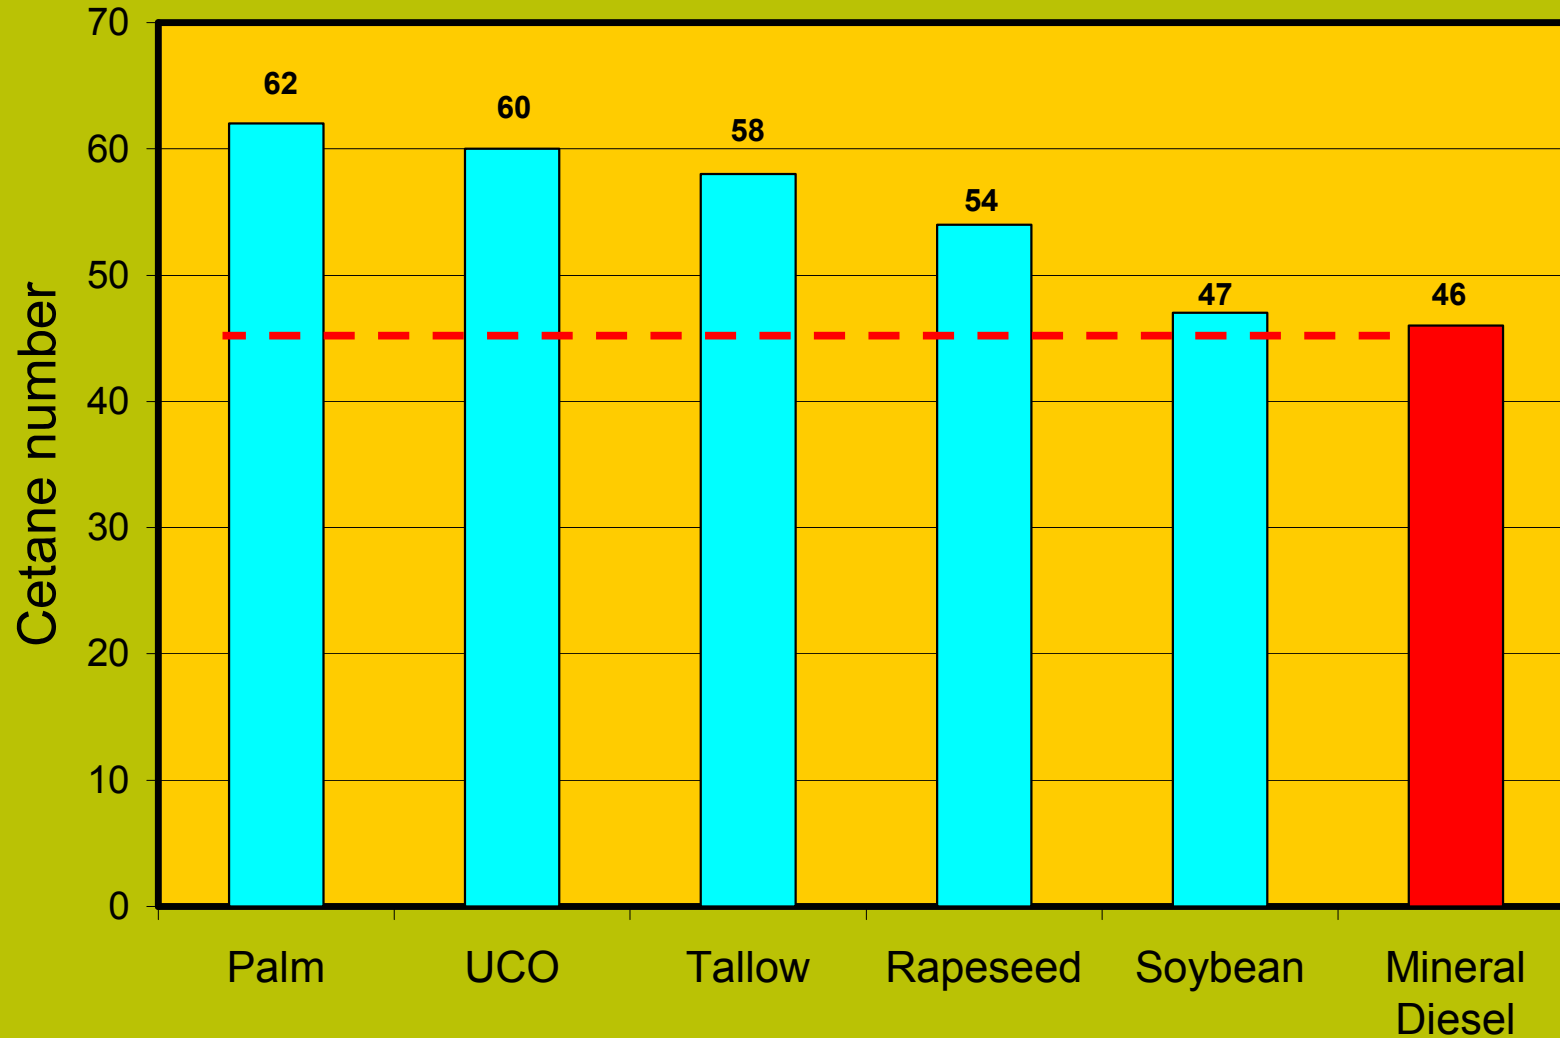

Note: OEMs typically have an optimum design range of 44 – 48.

**FUEL FOR OUR FUTURE**